


Tonsina Electromagnetic and Magnetic Airborne Geophysical Survey Data Compilation

State of Alaska, Department of Natural Resources, Division of Geological & Geophysical Surveys


-and-
CGG

<http://dx.doi.org/10.14509/29169>

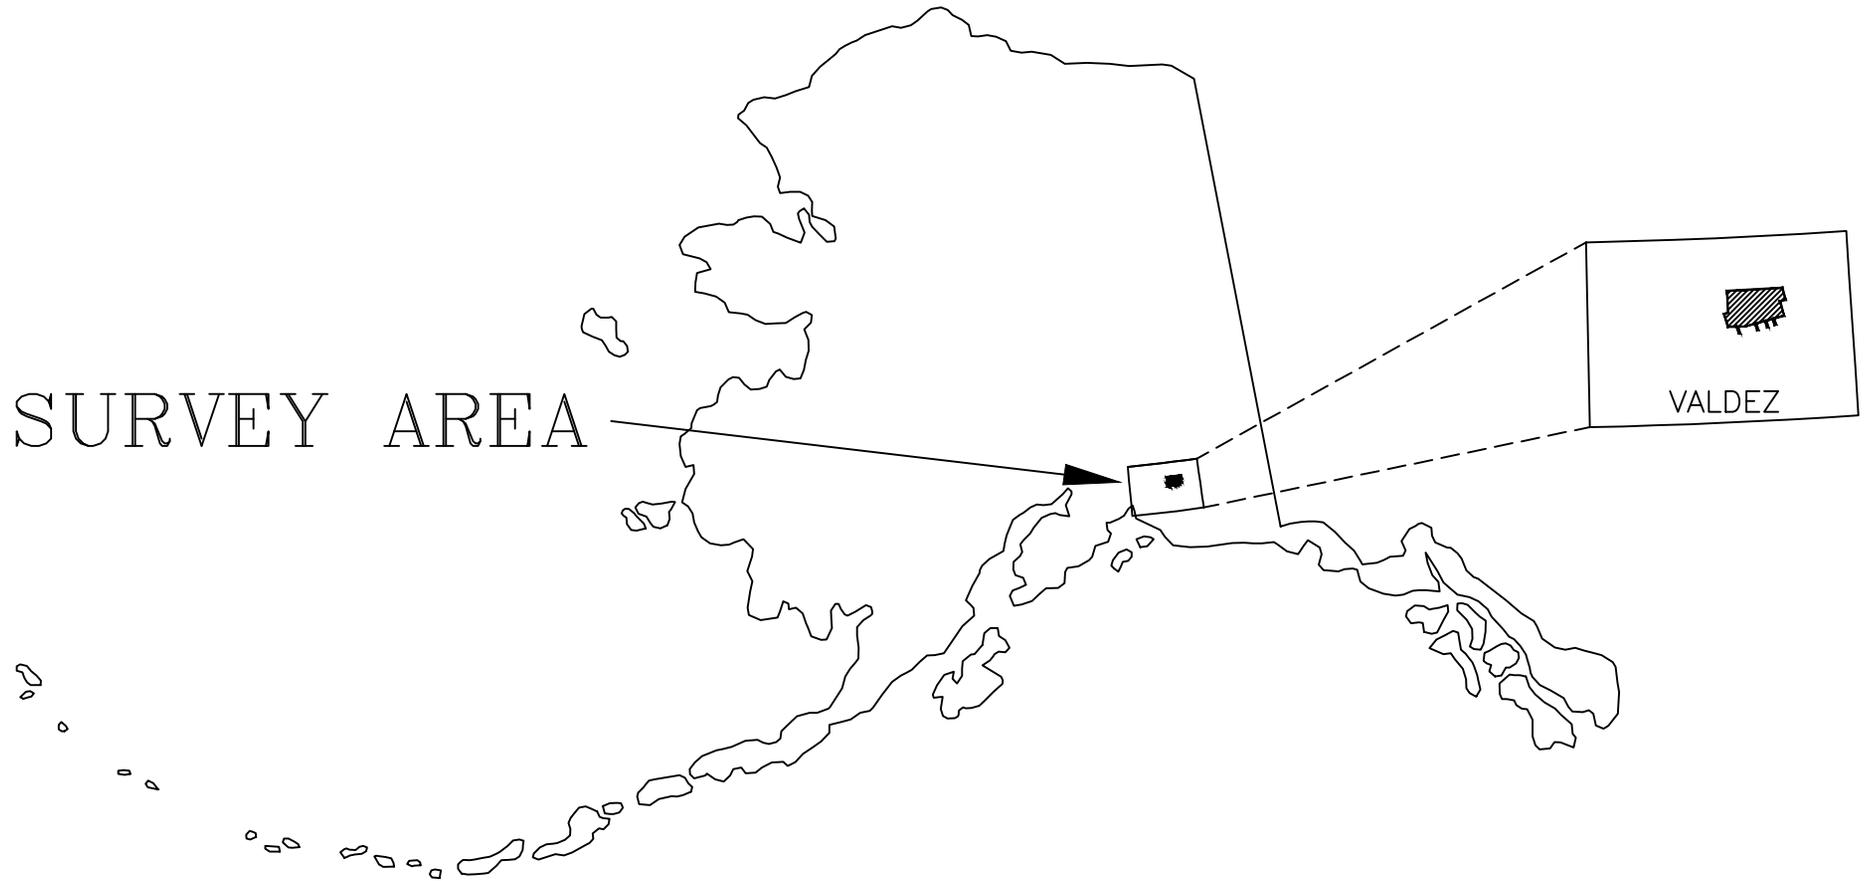

Survey Overview

Tonsina survey location map, showing the survey area (hatched), the Richardson Highway, towns, rivers, and relevant Valdez 1:63,360 Quadrangle boundaries.

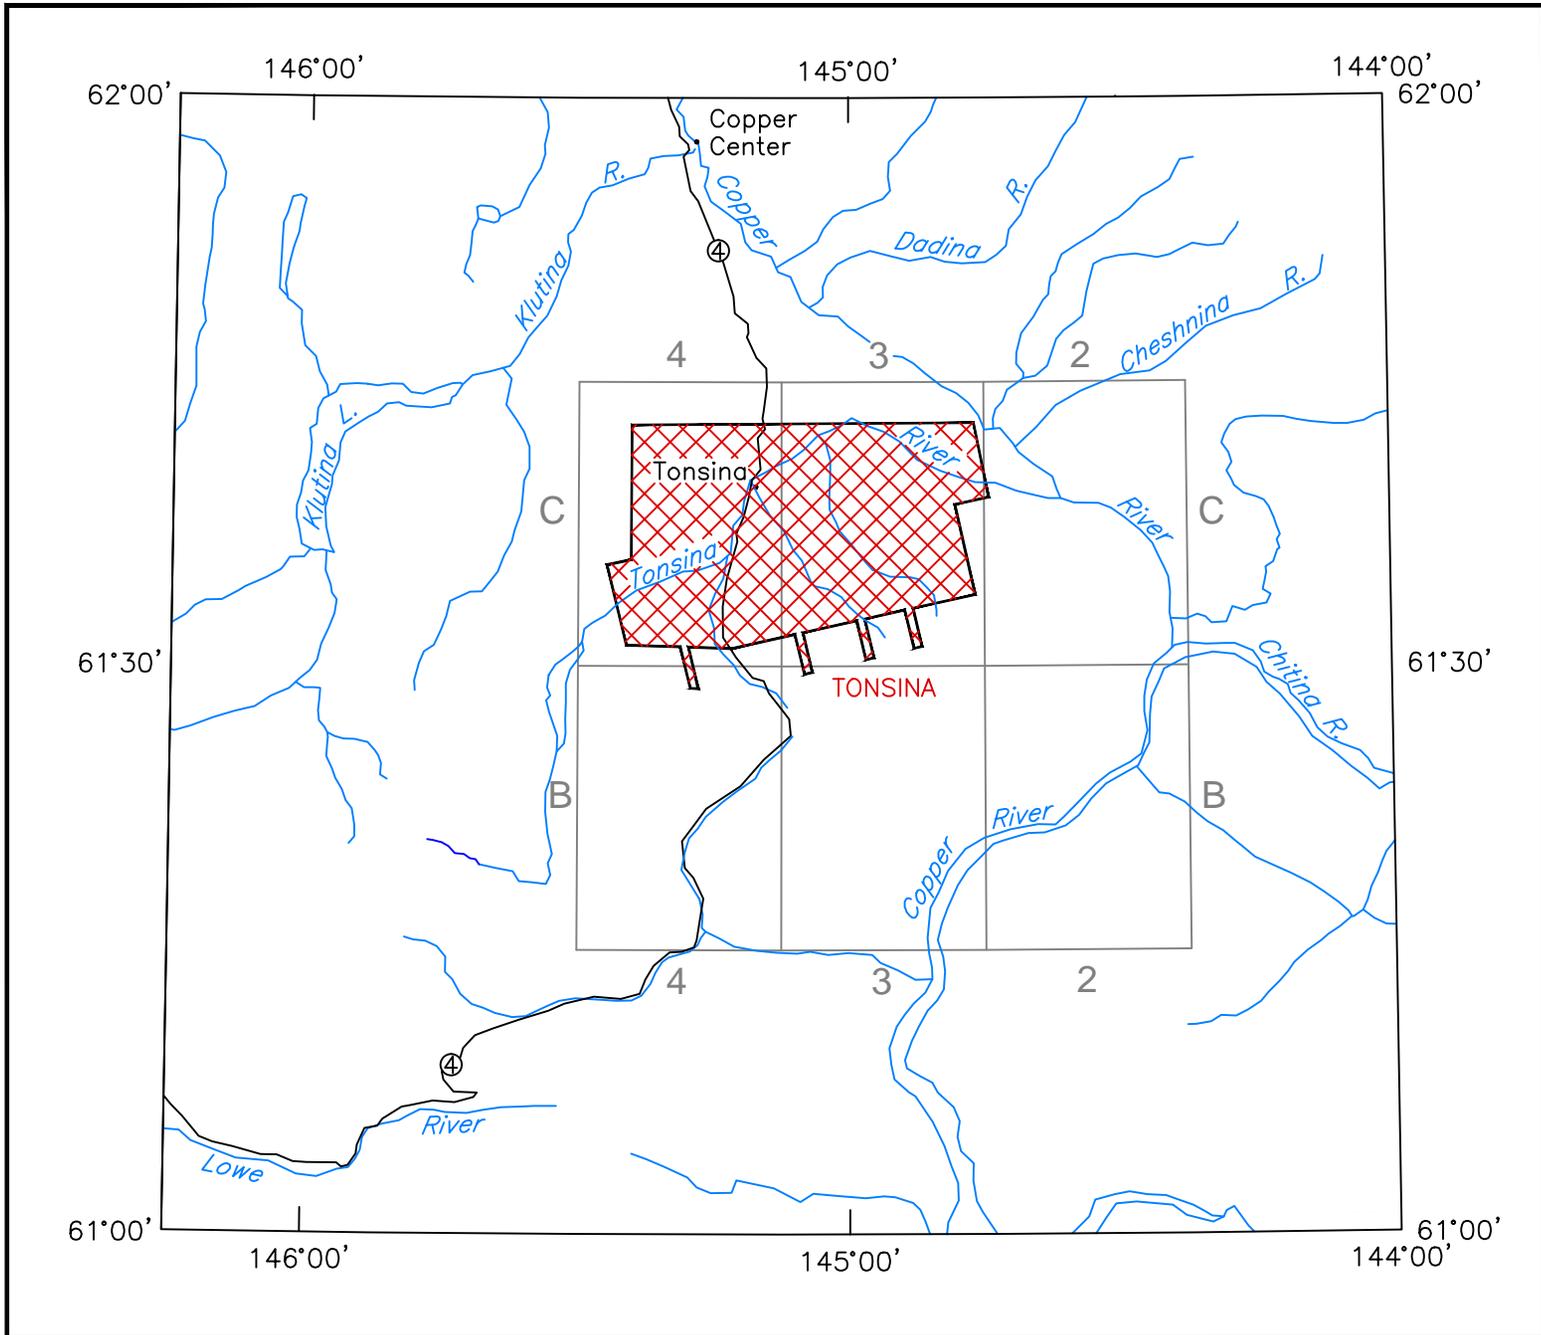

Flight Lines and Topography


Data Types: Frequency Domain Electromagnetic and Magnetic

System: DIGHEM^V

Frequencies: coaxial 1000 and 5500 Hz; coplanar 900 Hz, 7200 Hz and 56000 Hz

Line spacing: 400 meters


Nominal Sensor Terrain Clearance: 30 meters

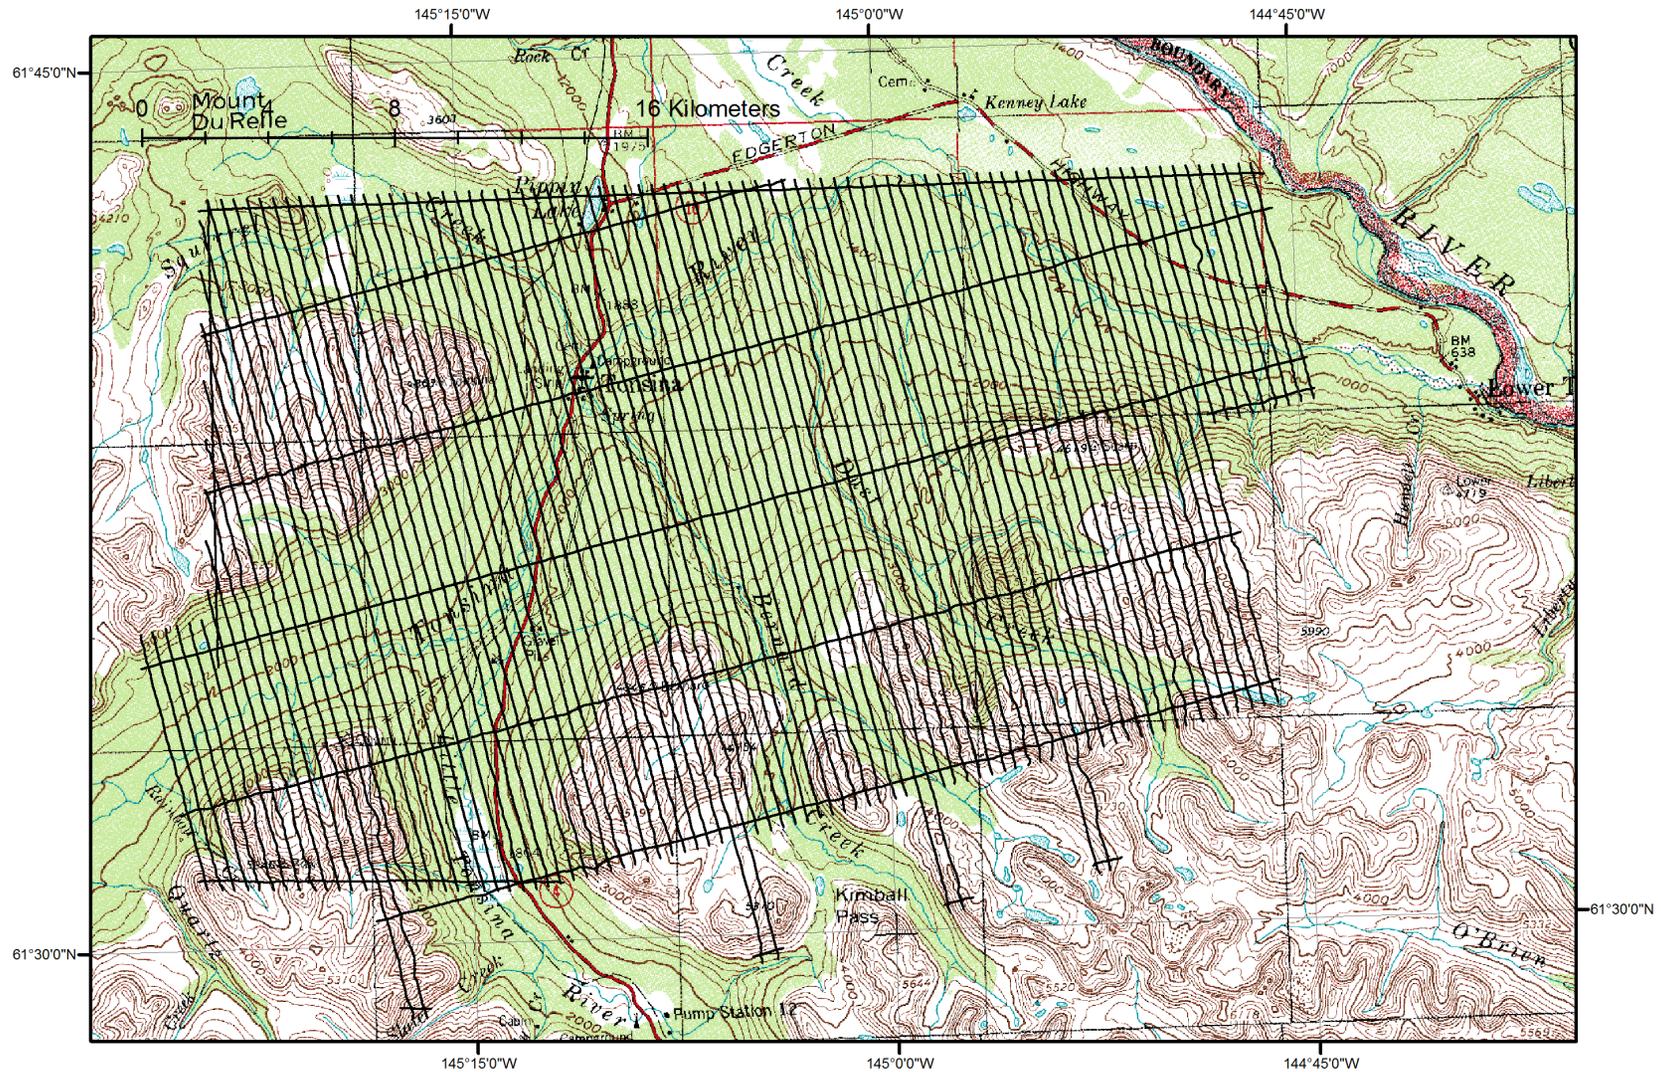

Residual Magnetic Field


The magnetic total field data were processed using digitally recorded data from a CGG D1344 magnetometer with a Scintrex CS3 cesium sensor. Data were collected at a sampling interval of 0.1 seconds. The magnetic data were (1) corrected for diurnal variations by subtraction of the digitally recorded base station magnetic data, (2) IGRF corrected (IGRF model 2010, updated for date of flight and altimeter variations), (3) leveled to the tie line data, and (4) interpolated onto a regular 80 m grid using a modified Akima (1970) technique. All grids were then resampled from the 80 m cell size down to a 25 m cell size to produce the maps and final grids in this publication.

Akima, H., 1970, A new method of interpolation and smooth curve fitting based on local procedures: Journal of the Association of Computing Machinery, v. 17, no. 4, p. 589-602.

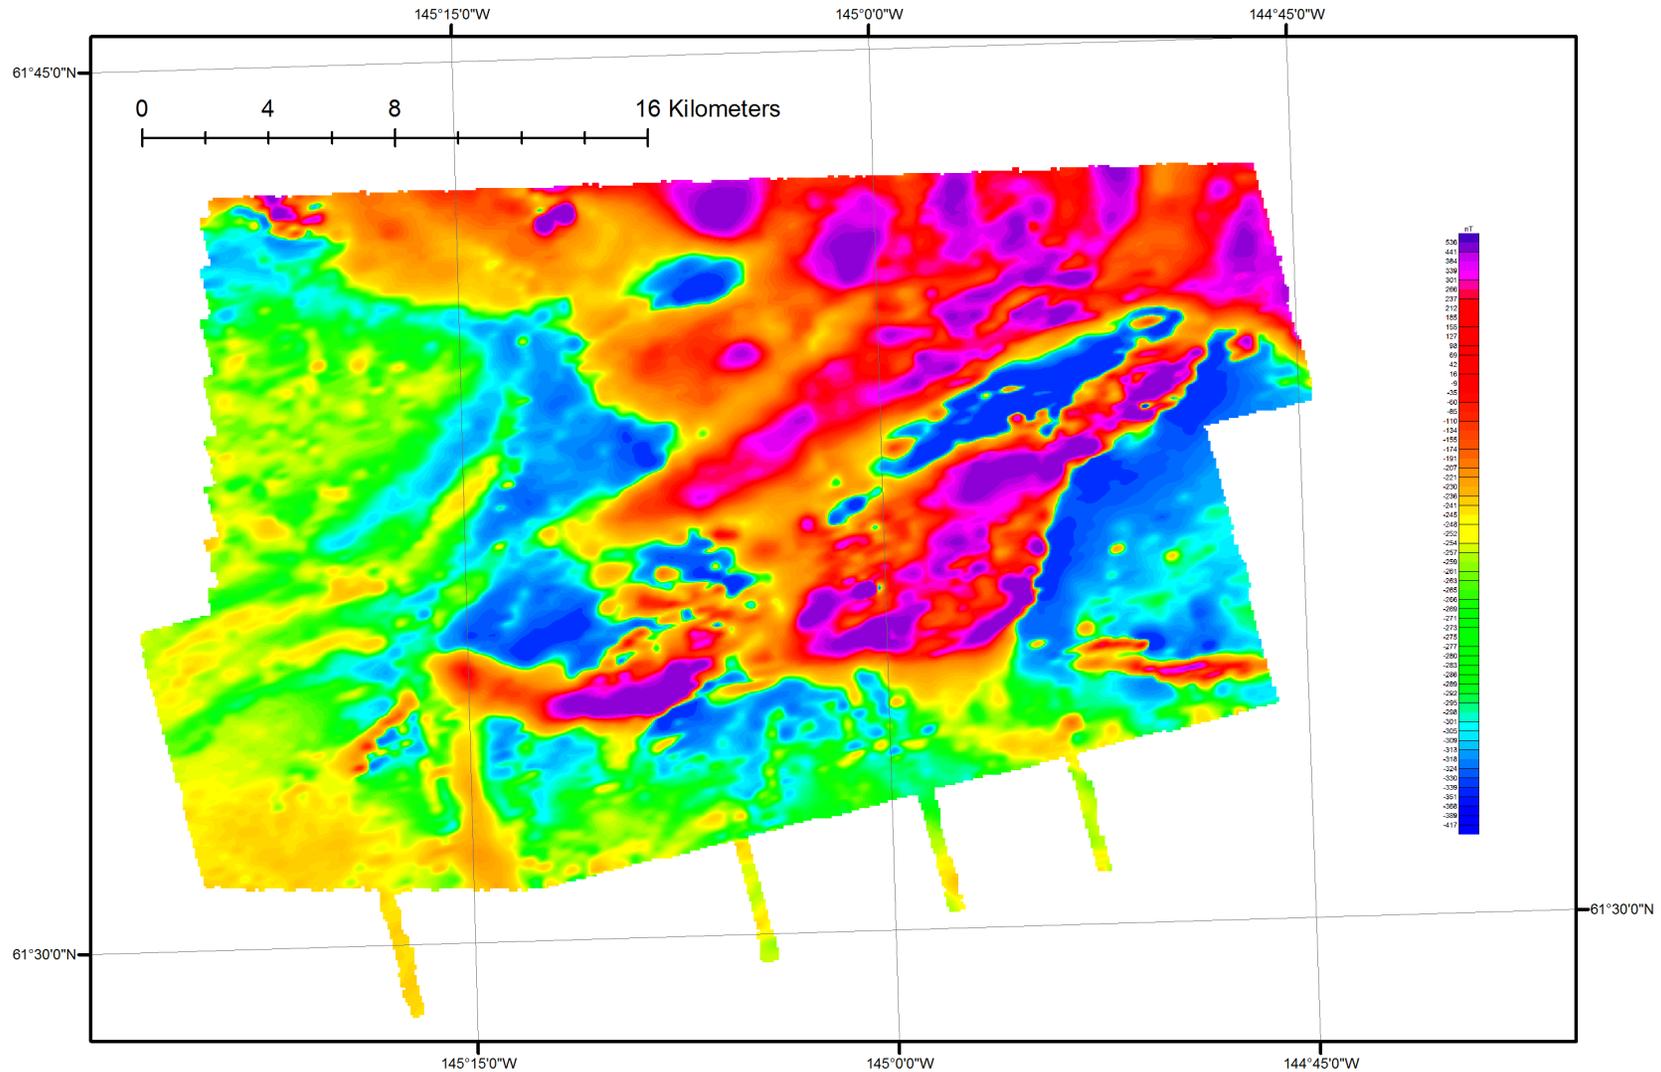

Analytic Signal


Analytic signal is the total amplitude of all directions of magnetic gradient calculated from the sum of the squares of the three orthogonal gradients. Mapped highs in the calculated analytic signal of magnetic parameter locate the anomalous source body edges and corners (e.g., contacts, fault/shear zones, etc.). Analytic signal maxima are located directly over faults and contacts, regardless of structural dip, and independently of the direction of the induced and/or remanent magnetizations.

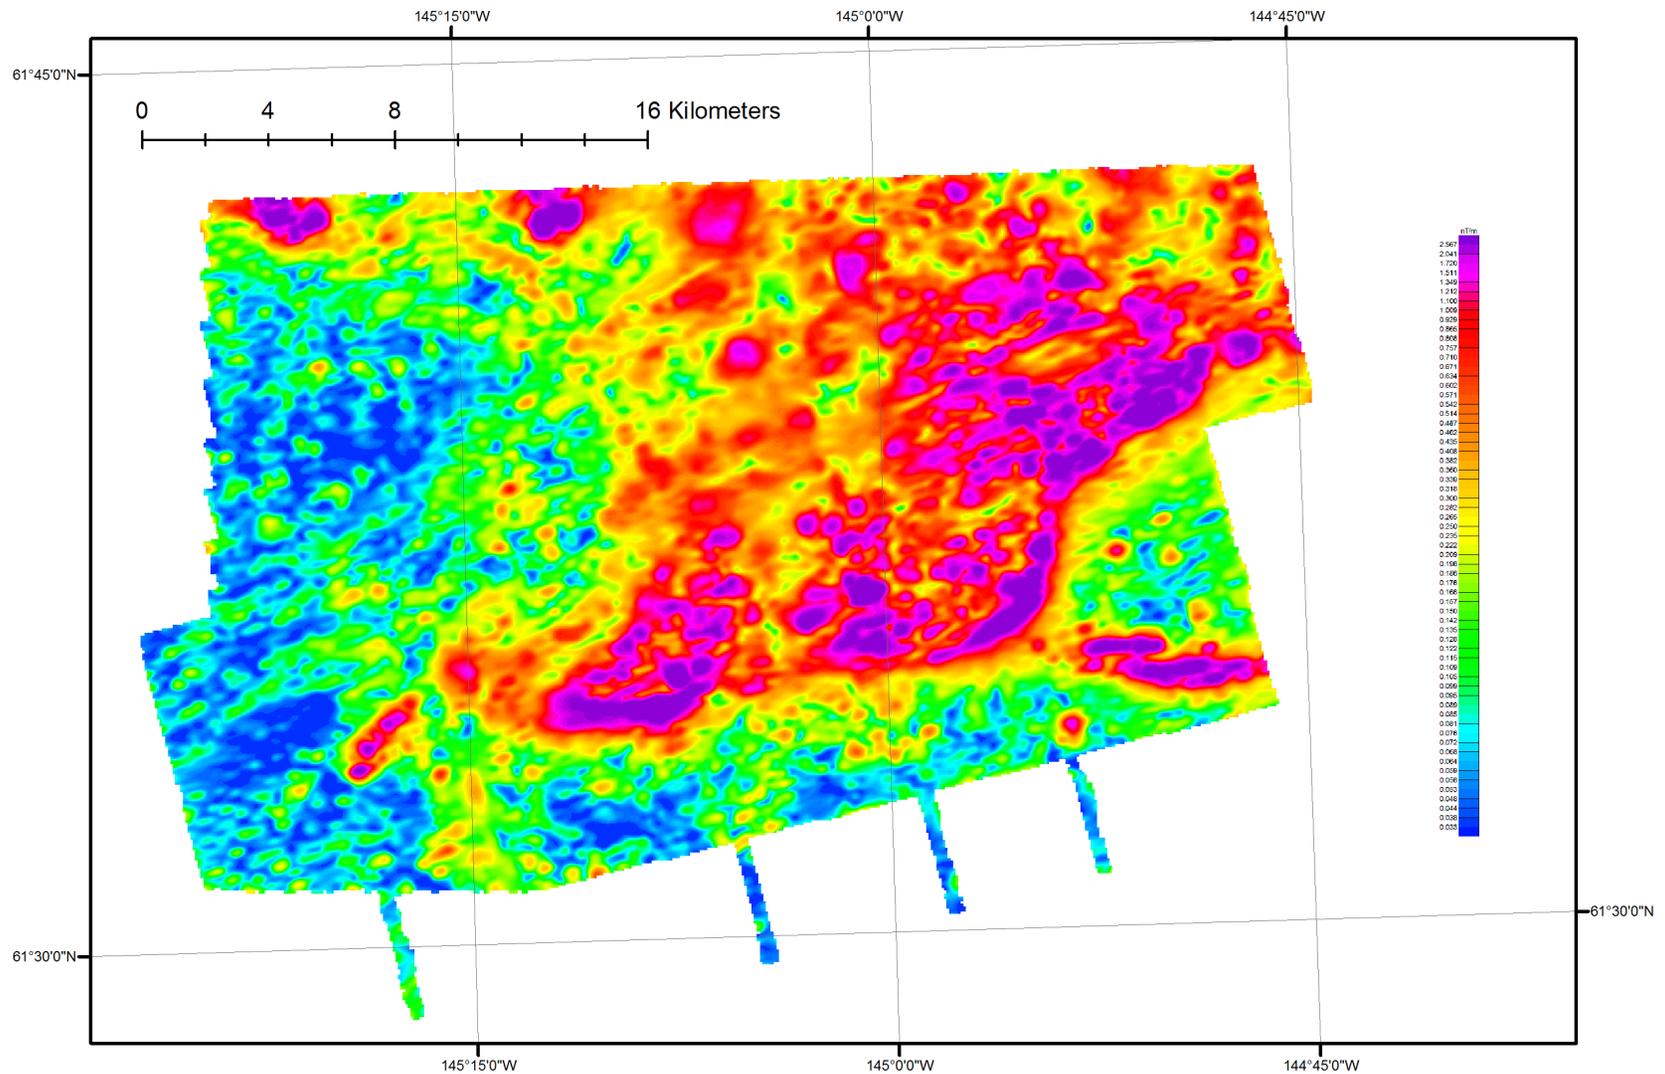

First Vertical Derivative of the Magnetic Field


The magnetic total field data were processed using digitally recorded data from a CGG D1344 magnetometer with a Scintrex CS3 cesium sensor. Data were collected at a sampling interval of 0.1 seconds. The magnetic data were (1) corrected for diurnal variations by subtraction of the digitally recorded base station magnetic data, (2) IGRF corrected (IGRF model 2010, updated for date of flight and altimeter variations), (3) leveled to the tie line data, and (4) interpolated onto a regular 80 m grid using a modified Akima (1970) technique. All grids were then resampled from the 80 m cell size down to a 25 m cell size to produce the maps and final grids in this publication. The first vertical derivative grid was calculated from the processed magnetic total field grid using a FFT base frequency domain filtering algorithm. The resulting first vertical derivative grid provides better definition and resolution of near-surface magnetic units and helps to identify weak magnetic features that may not be evident on the total field data.

Akima, H., 1970, A new method of interpolation and smooth curve fitting based on local procedures: *Journal of the Association of Computing Machinery*, v. 17, no. 4, p. 589-602.

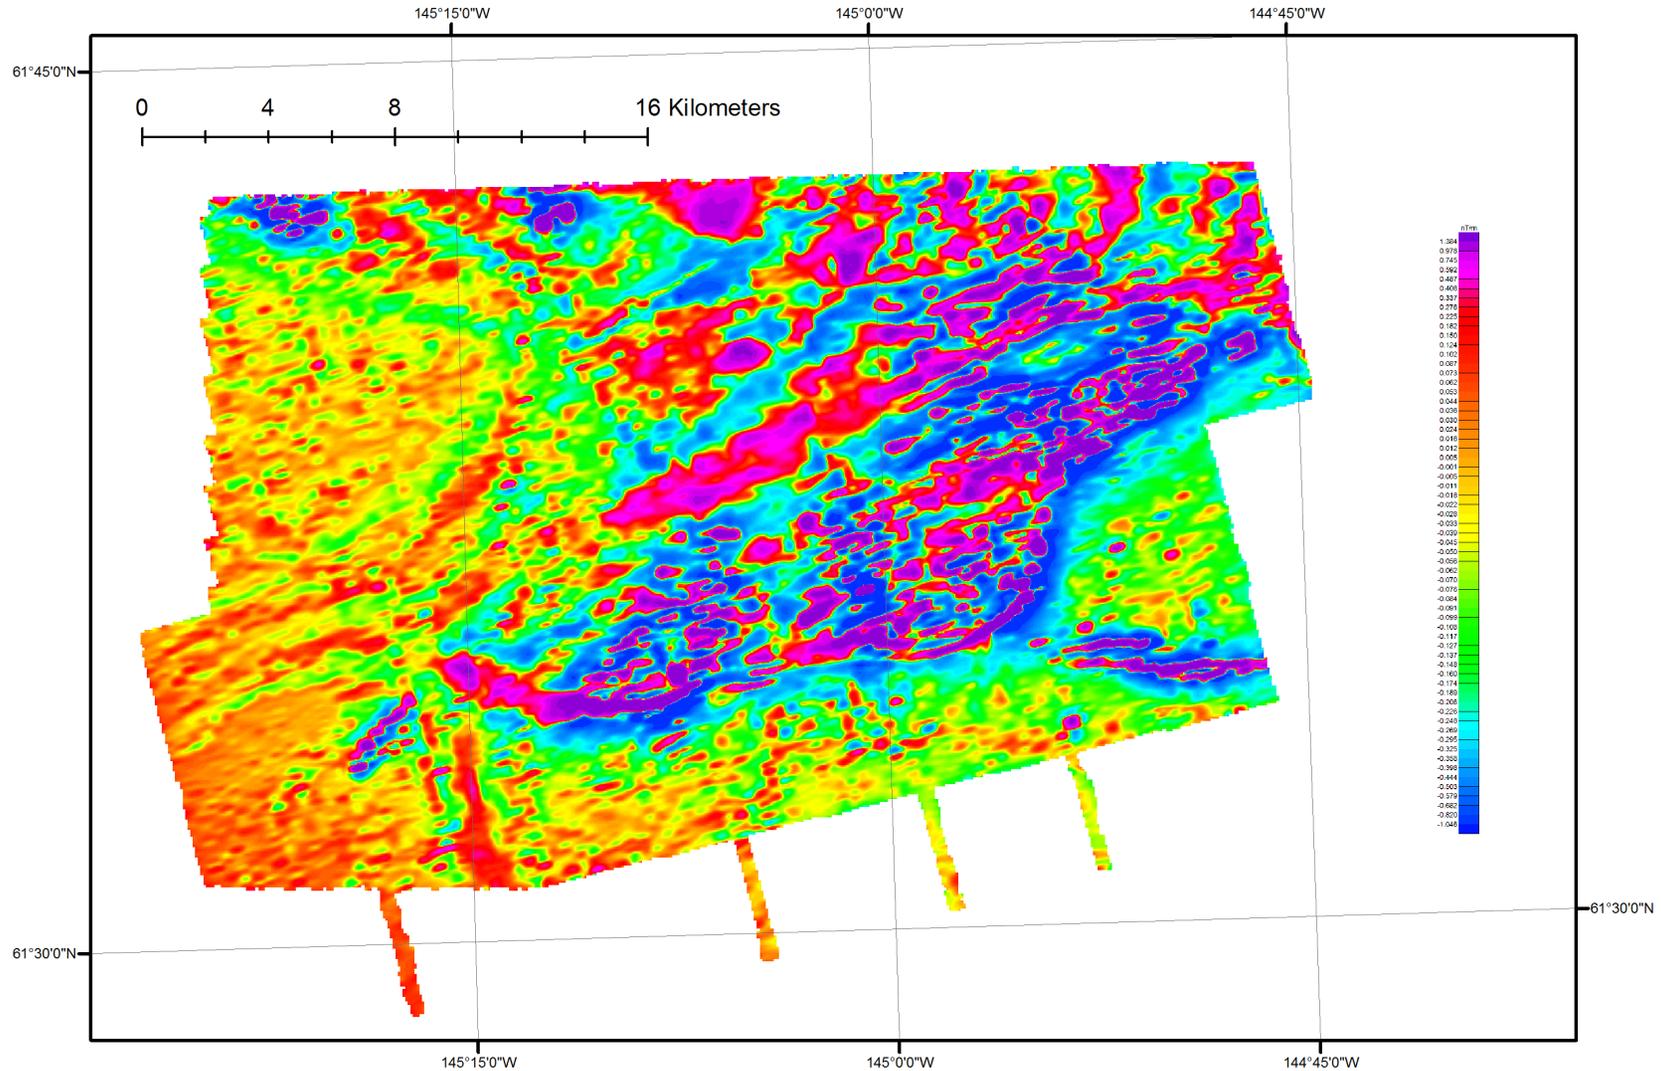

Magnetic Tilt Derivative


The tilt derivative is the angle between the horizontal gradient and the total gradient, which is useful for identifying the depth and type of source. The tilt angle is positive over the source, crosses through zero at, or near, the edge of a vertical-sided source, and is negative outside the source region. It has the added advantage of responding equally well to shallow and deep sources and is able to resolve deeper sources that may be masked by larger responses from shallower sources.

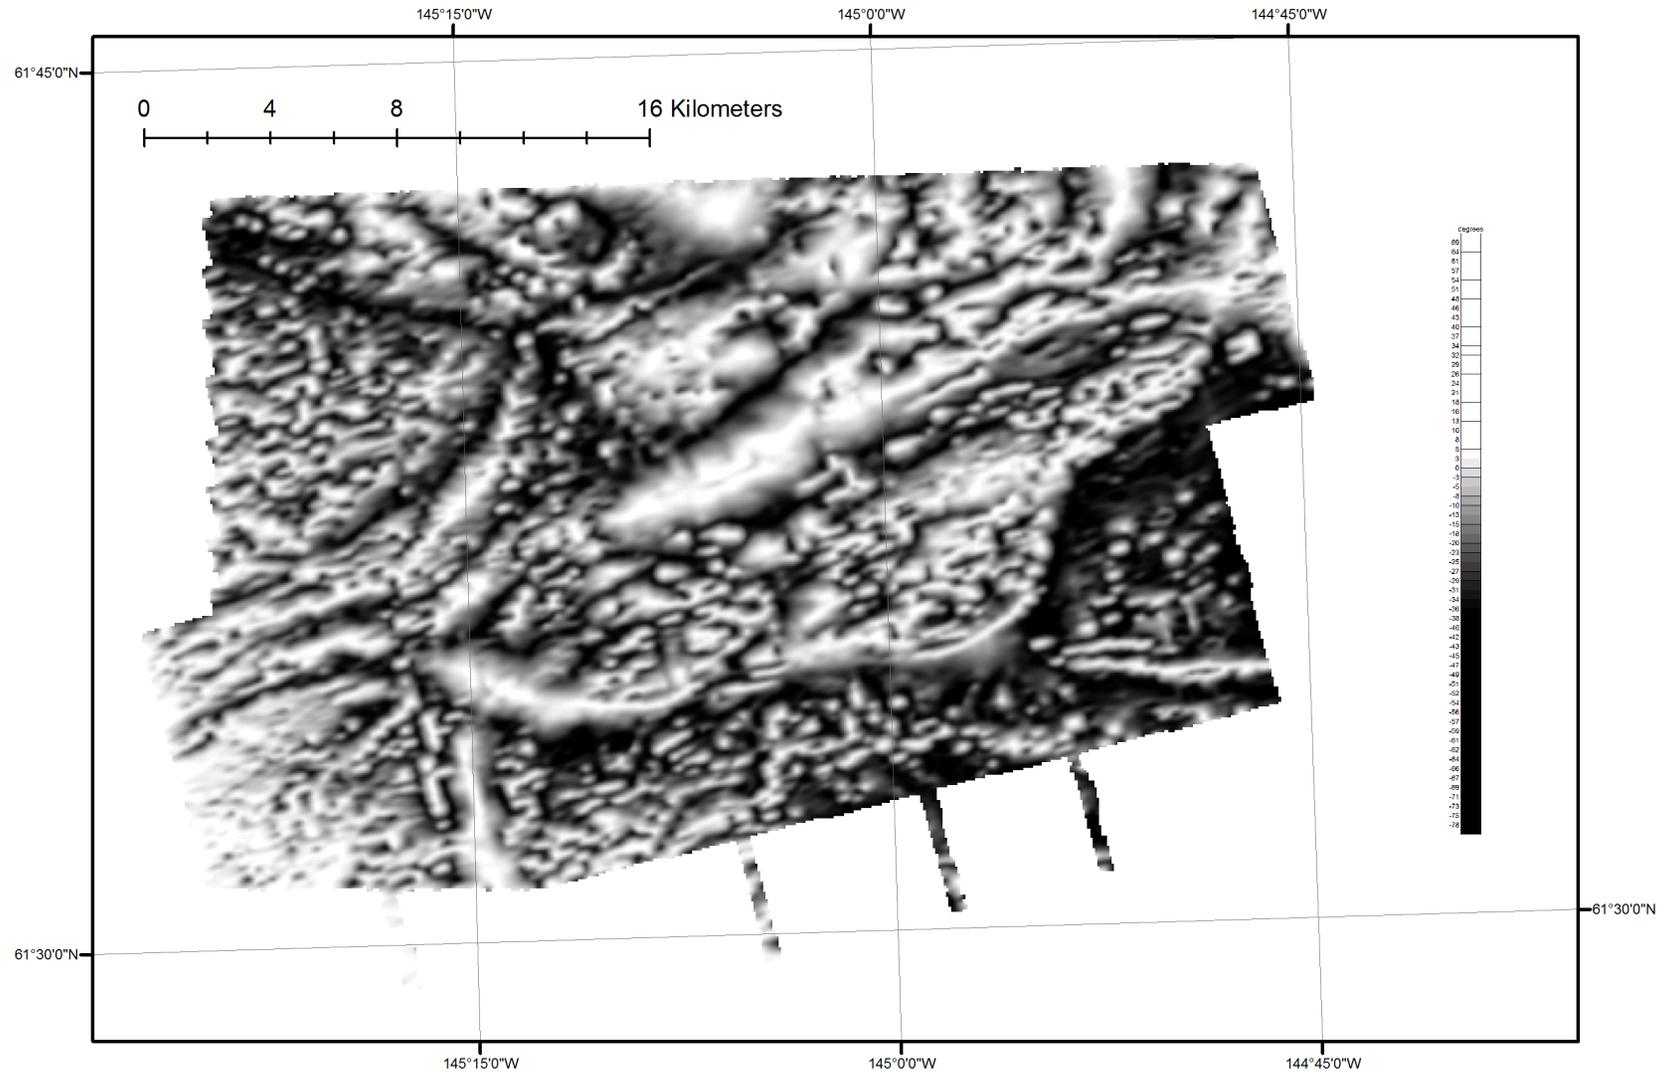

Apparent Resistivity 56,000 Hz

The DIGHEM EM system measured inphase and quadrature components at five frequencies. Two vertical coaxial coil-pairs operated at 1,000 and 5,500 Hz while three horizontal coplanar coil-pairs operated at 900, 7,200 and 56,000 Hz. EM data were sampled at 0.1 second intervals. The EM system responds to bedrock conductors, conductive overburden, and cultural sources. Apparent resistivity is generated from the inphase and quadrature component of the coplanar data using the pseudo-layer half-space model. The data were interpolated onto a regular 80 m grid using a modified Akima (1970) technique. All grids were then resampled from the 80 m cell size down to a 25 m cell size to produce the maps and final grids in this publication.


Akima, H., 1970, A new method of interpolation and smooth curve fitting based on local procedures: Journal of the Association of Computing Machinery, v. 17, no. 4, p. 589-602.

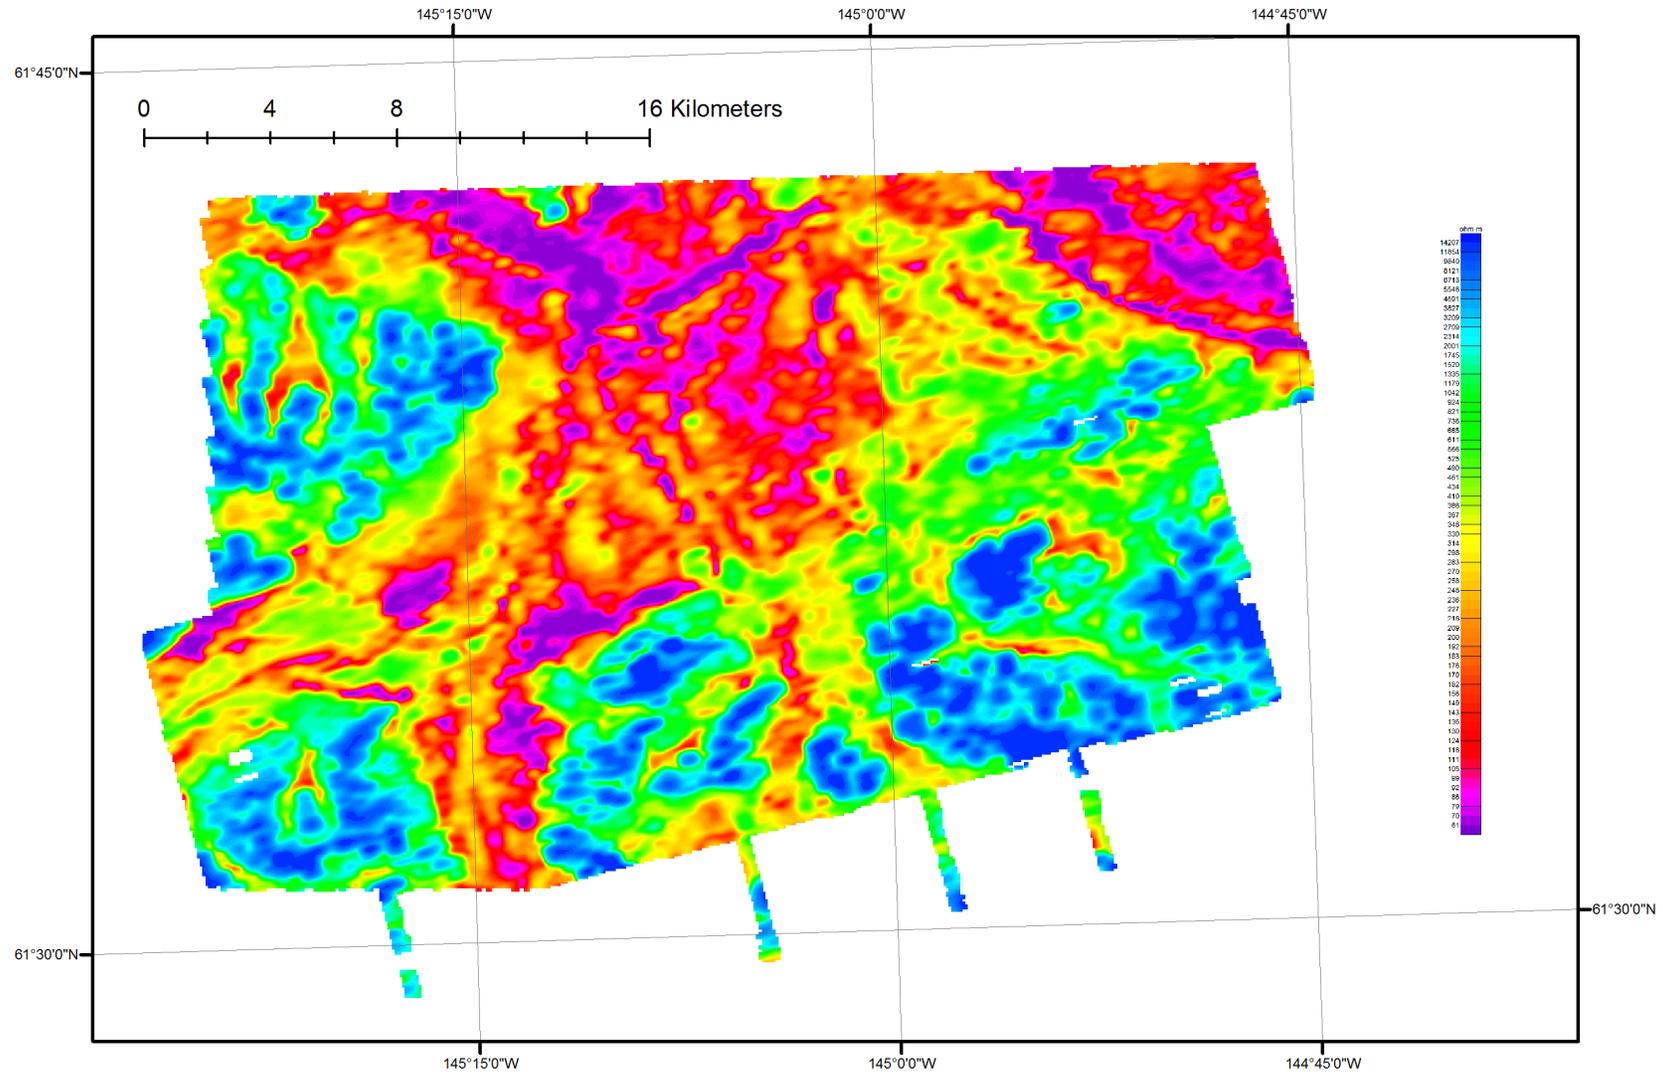

Apparent Resistivity 7,200 Hz

The DIGHEM EM system measured inphase and quadrature components at five frequencies. Two vertical coaxial coil-pairs operated at 1,000 and 5,500 Hz while three horizontal coplanar coil-pairs operated at 900, 7,200 and 56,000 Hz. EM data were sampled at 0.1 second intervals. The EM system responds to bedrock conductors, conductive overburden, and cultural sources. Apparent resistivity is generated from the inphase and quadrature component of the coplanar data using the pseudo-layer half-space model. The data were interpolated onto a regular 80 m grid using a modified Akima (1970) technique. All grids were then resampled from the 80 m cell size down to a 25 m cell size to produce the maps and final grids in this publication.


Akima, H., 1970, A new method of interpolation and smooth curve fitting based on local procedures: Journal of the Association of Computing Machinery, v. 17, no. 4, p. 589-602.

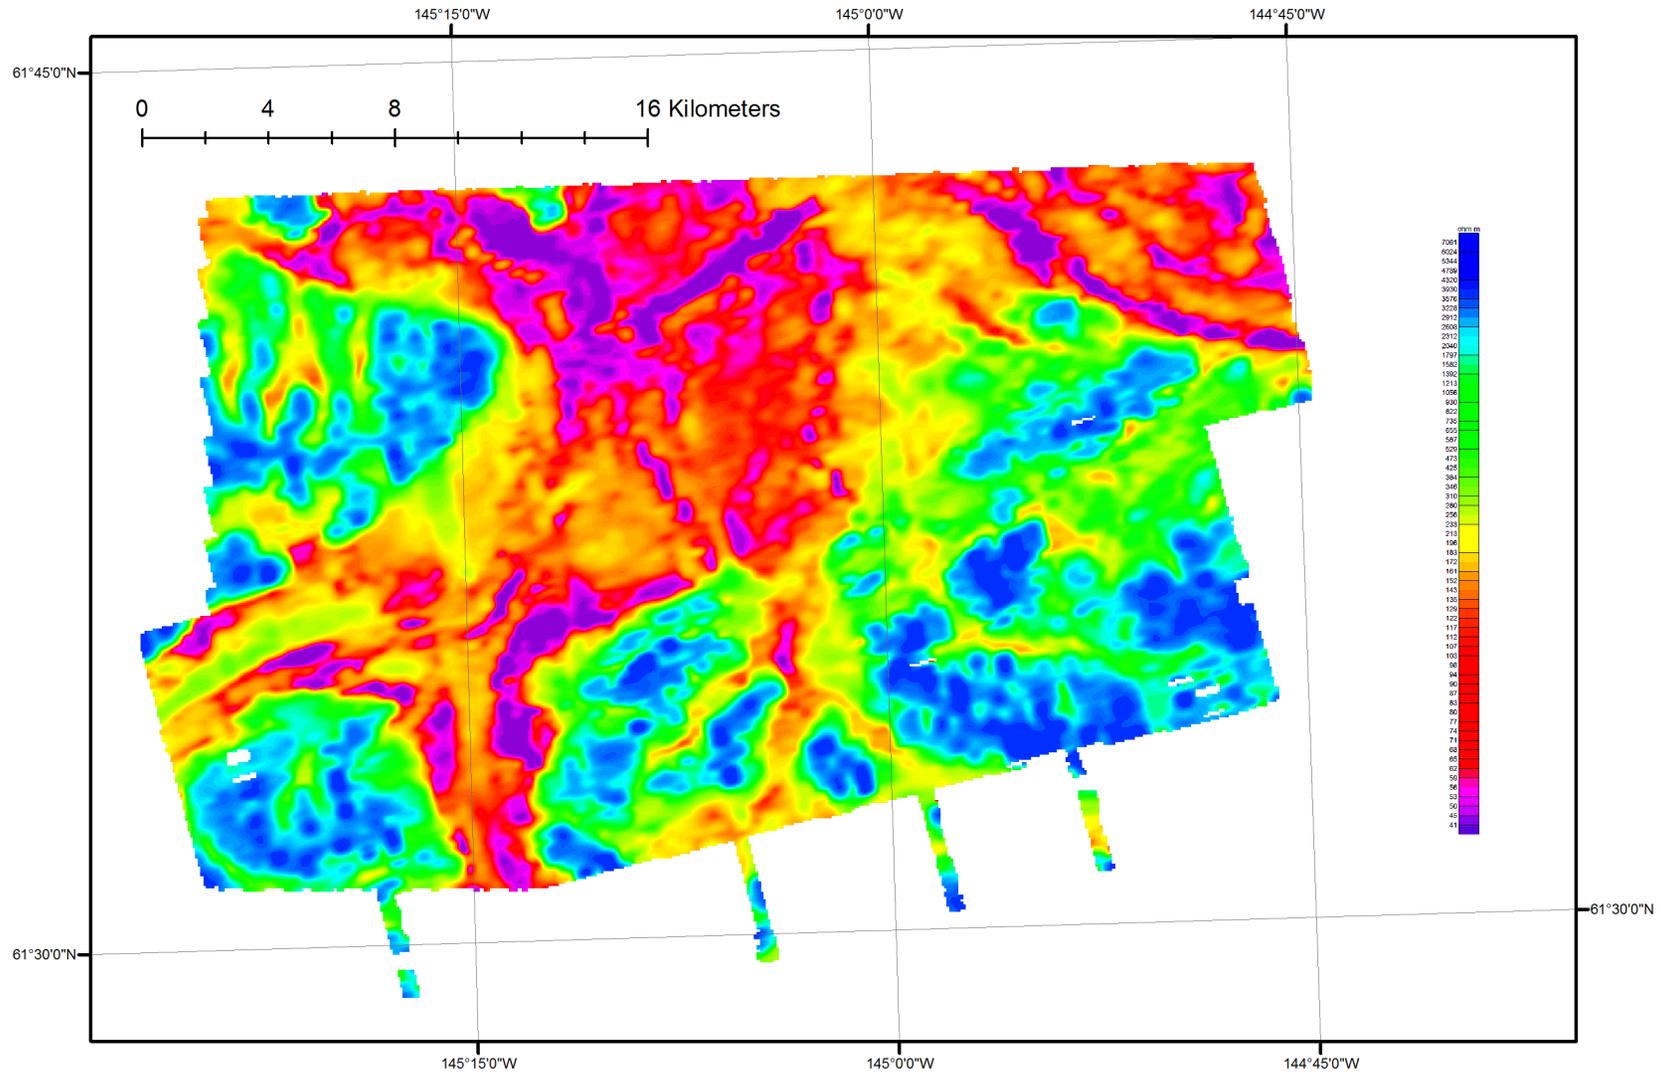

Apparent Resistivity 900 Hz


The DIGHEM EM system measured inphase and quadrature components at five frequencies. Two vertical coaxial coil-pairs operated at 1,000 and 5,500 Hz while three horizontal coplanar coil-pairs operated at 900, 7,200 and 56,000 Hz. EM data were sampled at 0.1 second intervals. The EM system responds to bedrock conductors, conductive overburden, and cultural sources. Apparent resistivity is generated from the inphase and quadrature component of the coplanar data using the pseudo-layer half-space model. The data were interpolated onto a regular 80 m grid using a modified Akima (1970) technique. All grids were then resampled from the 80 m cell size down to a 25 m cell size to produce the maps and final grids in this publication.

Akima, H., 1970, A new method of interpolation and smooth curve fitting based on local procedures: Journal of the Association of Computing Machinery, v. 17, no. 4, p. 589-602.

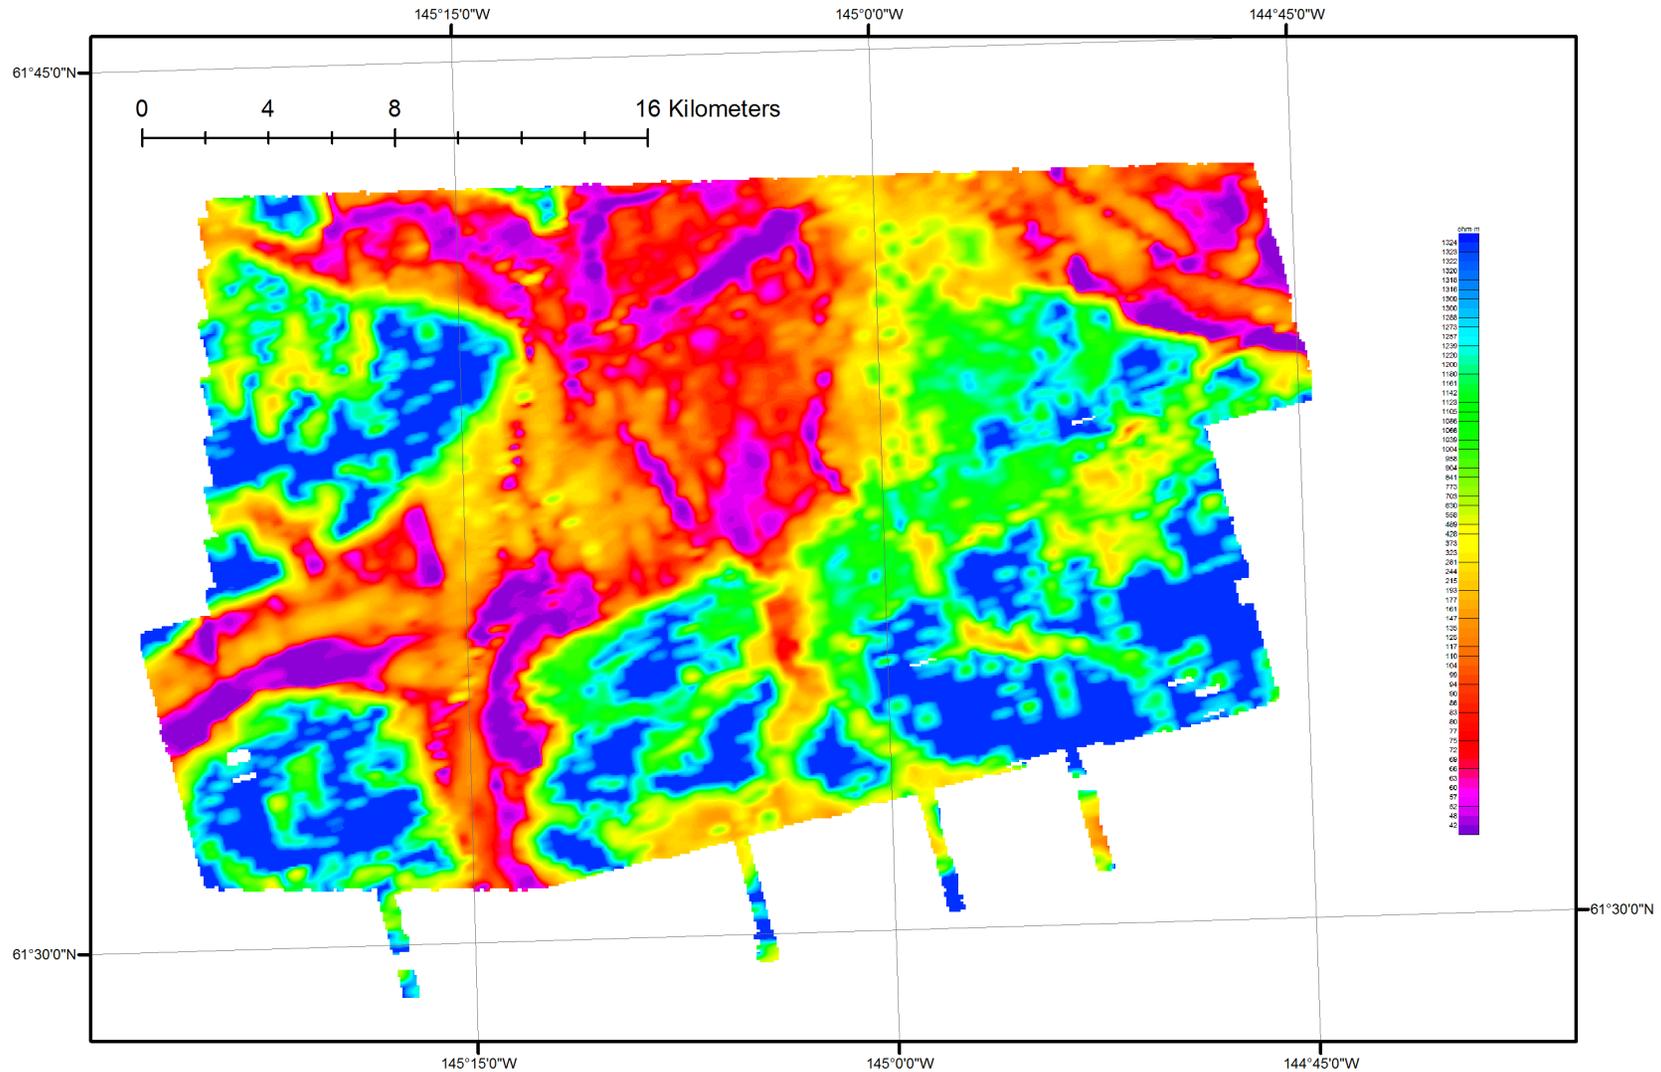

Electromagnetic and Magnetic Interpretation

Interpretation performed by CGG. Features in the data were mapped and are available in a variety of formats. Discrete electromagnetic anomalies (not shown) were also picked and are available in multiple formats.

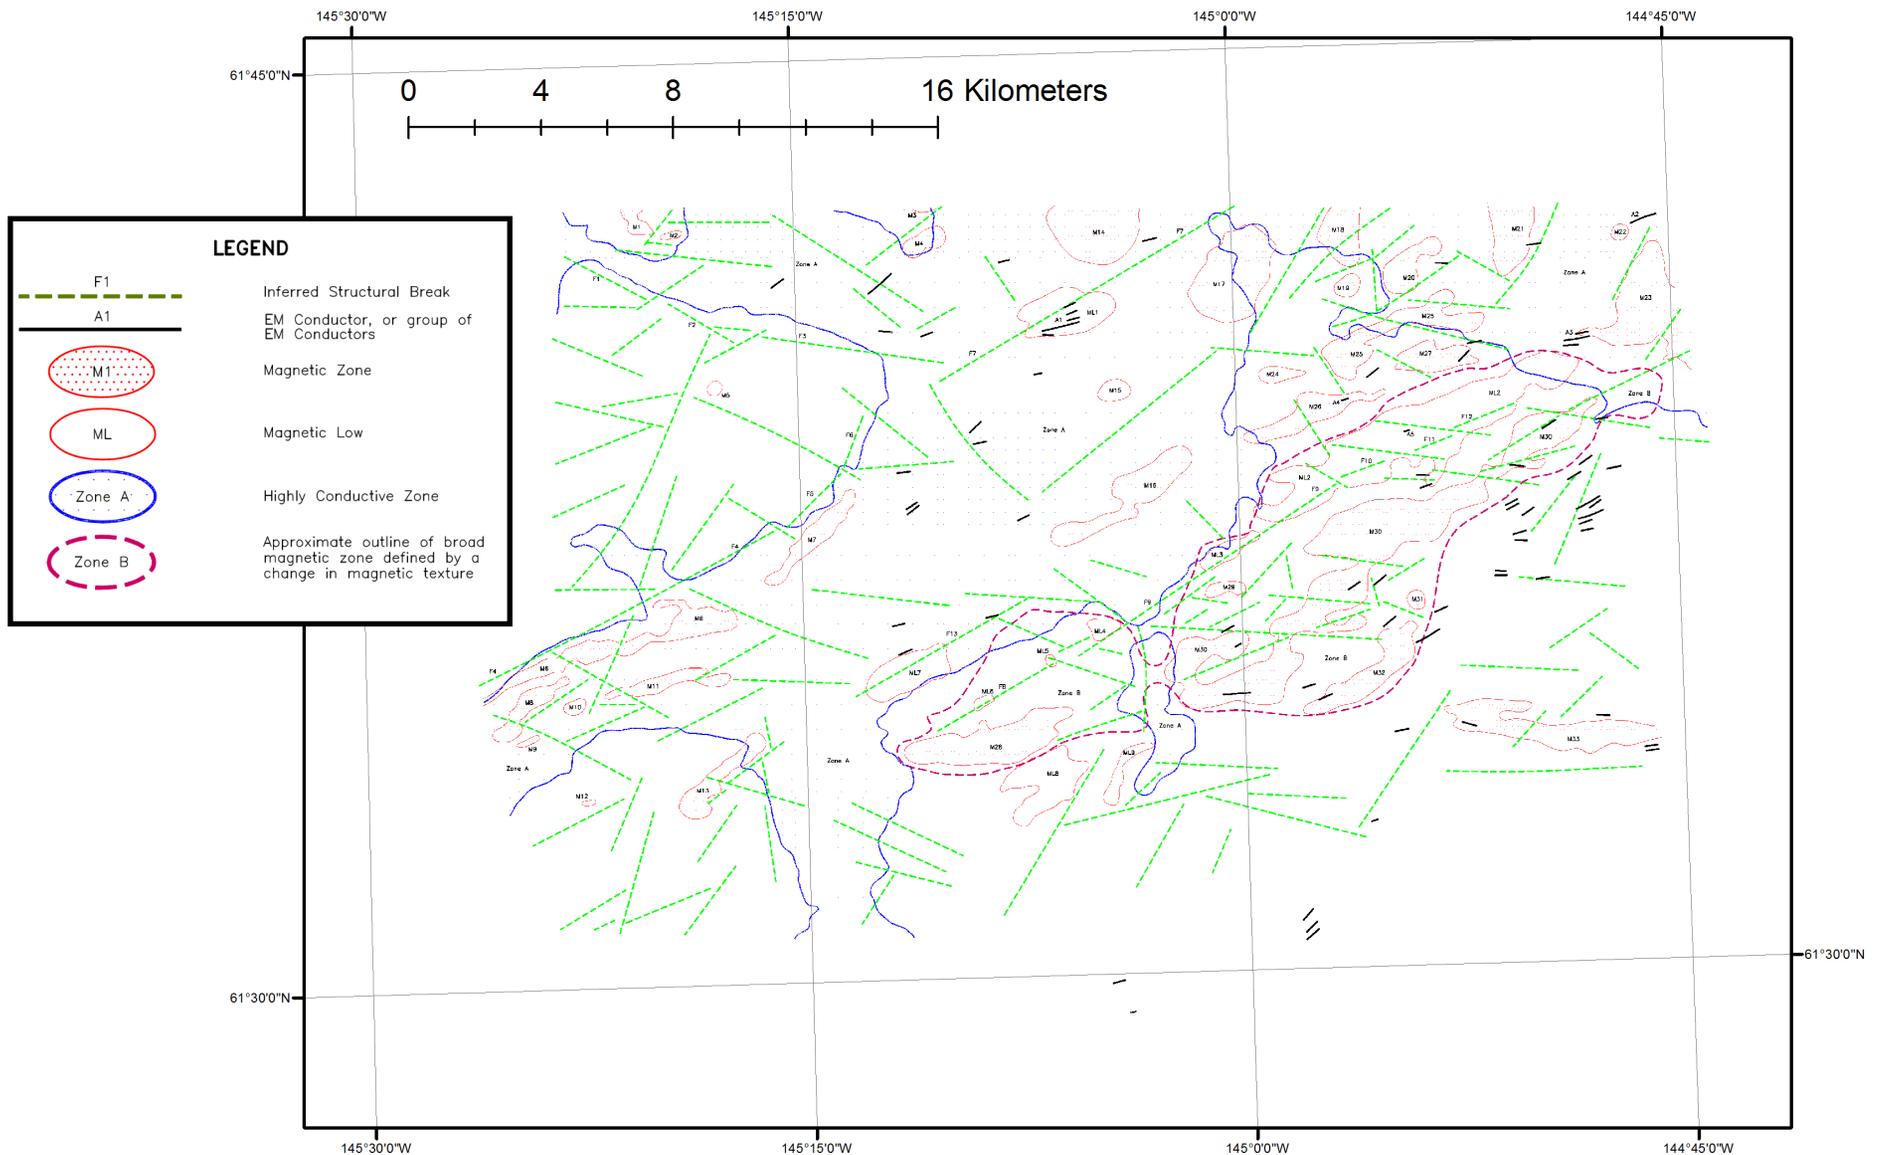

Stacked Multi-Channel Profiles

Magnetic, Electromagnetic, EM anomalies, and other data in profile are available in PDF format for all lines. Example shown below.

